

# LEGNO

luxury vinyl flooring



■ SupaClick



**LIMEGREEN**  
SOURCING SOLUTIONS

CHARDONNAY



GRENAACHE



PINOT GRIGIO



CHANTI RUSTIC



NEBBIOLO

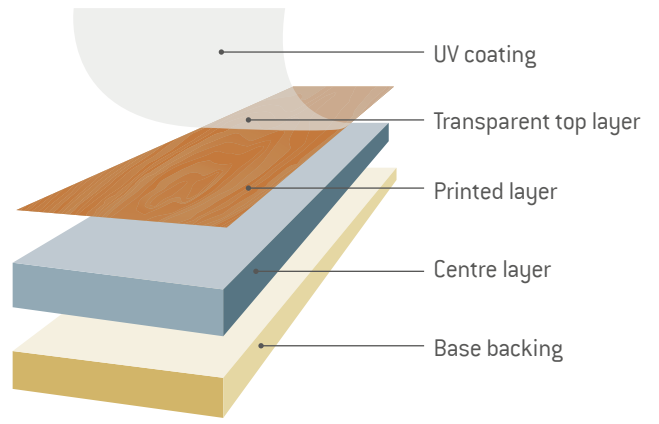





BORDEAUX



COLOURS

- Lightweight, quick and easy to install
- Warm, quiet and soft under foot
- Natural looking grain and surface texture
- Resistance to medium commercial foot traffic
- Easy to clean and maintain
- Highly resilient, no chipping or cracking
- Excellent UV stability
- Certified to –ASTM F1700 Standards
- 15 years residential warranty against wear
- 10 years commercial warranty against wear.



LUXURY VINYL TILE (LVT)	CLICK	VALINGE LOCK SYSTEM	BEVELLED EDGE	TOP LAYER 0.5MM
Format	200mm(w) x 1220mm(l)			
Surface Finish	matt, embossed			
Bevelled Edge	yes			
Thickness	5mm			
Wear Layer	0,5mm			
Packaging	2.196m <sup>2</sup> per box 9 pieces per box			

TEST	TEST METHOD	LEGNO RESULTS
SOUND REDUCTION	EN ISO 717-2: 2013	7dB
ABRASION	EN 649: 2011	Group T
SLIP RESISTANCE	EN 13036 - 4: 2011	R10
DIMENSIONAL STABILITY	EN ISO 23999	≤ 0.25%
PEELING RESISTANCE	EN ISO 24345	≥ 50 N/50mm
CURL (6h - 80C)	EN ISO 23999	± 2.0mm (0.3)
SQUARENESS	EN ISO 24342	L: ≤ 0.35mm W: ≤ 0.25mm
CASTOR CHAIR RESISTANCE	ISO 4918	After 25000 Cycles - No Damage
COLOUR FASTNESS	EN ISO 105-B02 method 3	≥ 6
RESIDUAL INDENTATION	EN ISO 24343-1	≤ 0.10mm
CLICK STRENGTH	Factory Method	≥80N / 100mm
GLOSS	Factory Method	6-10°
OPENING BETWEEN PLANKS	Factory Method	Average <0.15
LVT ADHESIVE PEELING RESISTANCE	EN ISO 24345	≥ 0.4 N/50mm

The vinyl flooring contains no harmful chemicals as far as could be established during testing. Plasticisers found are iso or terephthalates which are not considered as a health risk.

For fitting instructions and further product information, please visit our website [www.limegreenss.co.za](http://www.limegreenss.co.za)



Medium Foot Traffic



Wet Areas



Indoor



Floor Tile



Limit direct sunlight (<27 Deg C)



Slip Resistance **R10**



Shade Variation **V2**



Click Down

